


» AM4521 «

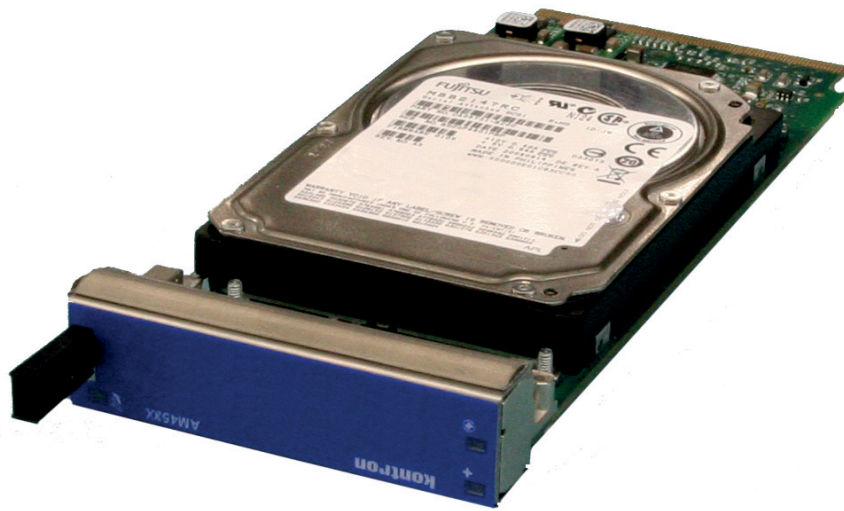

AdvancedMC SAS Storage Module

- » Fully compliant to AMC.0 revision 2
- » Available with 146GB capacity
- » Mid-Size or Full-Size form factor
- » AMC.3 compliant
- » IPMI 1.5 implementation

Fully compliant AMC.0 rev 2

Highly reliable and greater economies of scale

AdvancedMC modules are the key to extending the value of AdvancedTCA platforms designed for multiple applications in the wireless / wireline network infrastructure. The Kontron AM4521 AdvancedMC SAS module is the ideal high performance, highly reliable storage media for open modular communications solutions that need to achieve higher IOPs (input/output per second) performance in space-constrained network infrastructures. The Kontron AM4521 SAS module offers up to 146 GB of storage capacity, and is fully compliant to AMC.0 revision 2 and AMC.3

specifications. With a 10,000 rpm spindle plus the industry's highest reliability of 1.4M hours MTBF, this hot-swappable field replaceable unit (FRU) also follows the same stringent carrier grade RASM feature set, namely - Reliability, Availability, Serviceability, Maintainability. Integrate this module with AdvancedTCA platforms to help conserve valuable system AdvancedTCA system slots for greater economies of scale and reduced OPEX.

Technical Information

Hard Disk Features

Storage capacity: 146GB capacity
Seek time Track to Track: 0.2 ms typ.
Average: 4.1 ms typ. (read), 4.5 ms typ. (write); Maximum: 8.1 ms typ.
Data transfer to/from host: 300 MBytes/sec

Compliance

AMC.0 R2.0; AMC.3 R1.0

OS Compatibility

RedHat Linux Enterprise 4

IPMI Features

Management Controller compliant to PICMG 3.0, AMC.0 and IPMI v1.5 rev 1.1.
Management Controller is run time field reprogrammable without payload impact.
Robust fail safe reprogramming implementation (which includes two firmware images) that could perform automatic or manual rollback if a problem occurs during critical reprogramming phase.
Remote upgrade capability from all IPMI interfaces (via IPMB)
Management Controller self test, which can detect failure under its code integrity and trigger an automatic rollback.

Supervisory

Hardware system monitor through IPMI (voltage, currents, temperature), temperature monitor / alarm; board temperature sensor, power failure

Mechanical

181.5 x 75 x 30.16 mm, Full-Size
181.5 x 75 x 18.96 mm, Mid-Size

Power Requirements

Management power is less than 100 mA peak at 3.3V
Payload power is 2A peak and 1A normal operation

Safety / EMC

Safety: UL60950 3rd ED.; CSA C22.2 Ho 60950-00; EN 60950:2000; IEC60950-1; EMI/EMC: FCC 47 CFR Part 15, Class B; CE Mark to EN55022/EN55024

Environmental Temperature*

Operating: 0-55°C/32-131°F; Storage and Transit: -40 to +70°C/-40 to 158°F

Environmental Humidity*

Operating: 15% to 90% @55°C/131°F non-condensing; Storage&Transit: 5% to 95% @ 40°C/104°F non-condensing

Environmental Altitude*

Operating: 4,000 m / 13,123 ft; Storage and Transit: 15,000 m / 49,212 ft

Environmental Shock*

Operating: 30G, half-sine 11ms, each axis; Storage and Transit: Bellcore GR-63-CORE Section 4.3

Environmental Vibration*

Operating: 1.0G, 5-500Hz each axis; Storage and Transit: 0.5G, 5-50Hz; 3.0G, 50-500Hz each axis

Warranty

Two years limited warranty

* Designed to meet or exceed

CORPORATE OFFICES

Europe, Middle East & Africa

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany

Tel.: +49 (0) 821 4086-0
Fax: +49 (0) 821 4086 111
sales@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA

Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China

Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn