


» KTHM76/mITX «

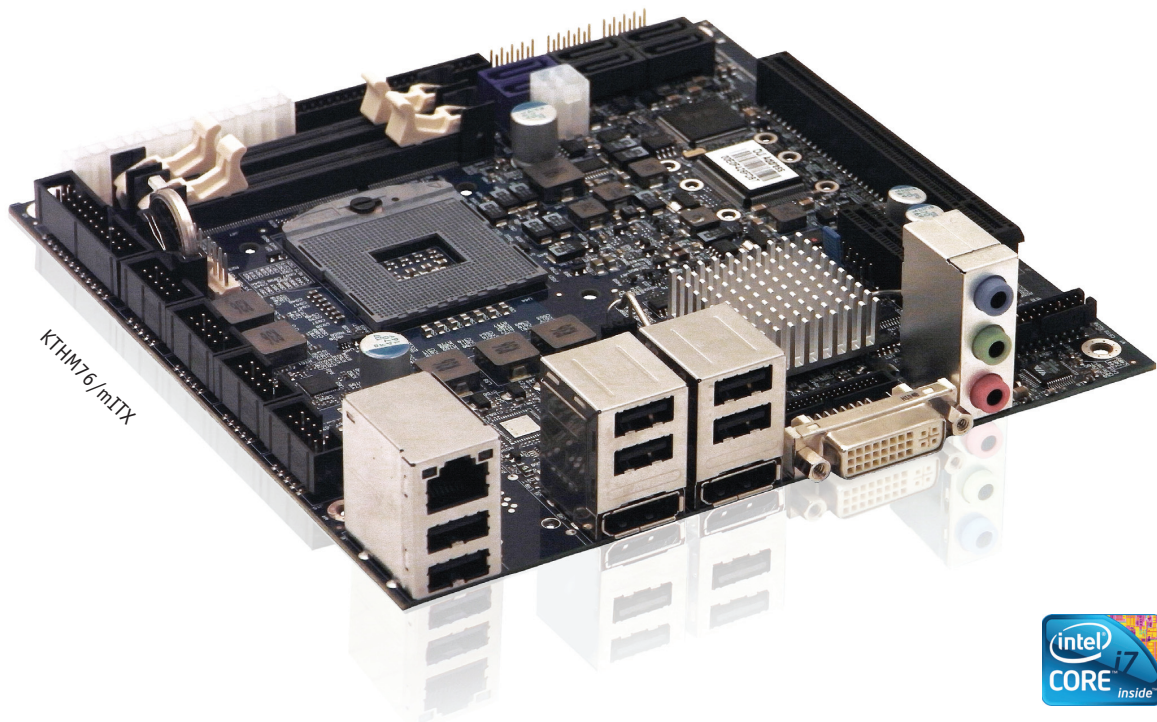

3rd Generation Intel® i7-,i5,-i3 Dual and Quad Core CPUs & Intel® HM76 Chipset

- » Long term available Embedded Motherboard
- » High graphics performance incl. 2x Display Port, LVDS & DVI
incl. 3x independent Display support
- » 6x SATA (incl. 2x SATA III), 8x USB 2.0 plus 4x USB 3.0,
1x Intel® GB LAN
- » mSATA interface highspeed compact SSD storage
- » One PCIe x 16, Gen. 3.0 plus one PCIe x 1, Gen. 2.0
- » Unique multipurpose KT Feature Connector

KTHM76/mITX

Typical Applications

- » **Digital Signage:** High graphics performance & multi display support
- » **Gaming/POS/POI:** High graphics and high CPU performance
- » **Medical:** High Graphics performance & longevity
- » **Industrial Automation:** wide range of I/Os & longevity
- » **Future-oriented Devices** due to Display Port and mSATA/ compact SSD support

General Technical Information

CPU	3rd Generation, Intel® i7-,i5-,i3 2 Core and 4 Core CPUs; Intel® Celeron® Processor B810
CPU Clock	Up to 2.7GHz (3.5 GHz in Turbo) depending on actual CPU
DMI	DMI 2.0 support; Four lanes in each direction; 5 GT/s point-to-point DMI interface to PCH is supported
Chipset	Intel® HM76
DRAM	Up to 8 GB DDR3 x2 (max. 16 GB) on Mini-ITX
SATA	6x SATA (incl. 2 x SATAIII)
USB	8x USB 2.0 plus 4x USB 3.0
Ethernet	1x Intel® GB LAN
Available I/Os	One PCIe x16, Gen. 3.0 plus one PCIe x1, Gen. 2.0, 4x COM, 2x mini PCI-Express, Internal PS2 Mouse/Keyboard connector
Graphics Controller	Integrated, Intel® HD4000 with support for 3 independent Displays
Graphic Interface	2x Display port, 1 DVI-I, LVDS, HDMI via Adapter / Gen 3.0 PCIe x16 slot
Audio	HD 7.1, Mic x2, CDROM in and SPDIF
Rear I/O	2x (Dual USB +Displayport), Dual USB + Ethernet, DVI, Audio 3x
Temperature	Operating 0°C - 60°C (32°F - 140°F)
Special Feature	GPIO, TPM 1.2, mSATA for SSD Storage, ATX and single 12V power supply, KT embedded feature port with ADC, DAC up to 160 GPIO
Additional	Up to 7 years availability

The KTQM family consists of members having different form factors, and the same functionality except for the functions listed in the table below.

Available Form Factors

KTHM76/mITX variants	Format	PCI	SODIMM Sockets	Single +12V Power Supply
KTHM76/mITX	mITX	-	2	Yes

Available as well with Intel® QM77 Chipset with extended feature set.

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

