


CP6930

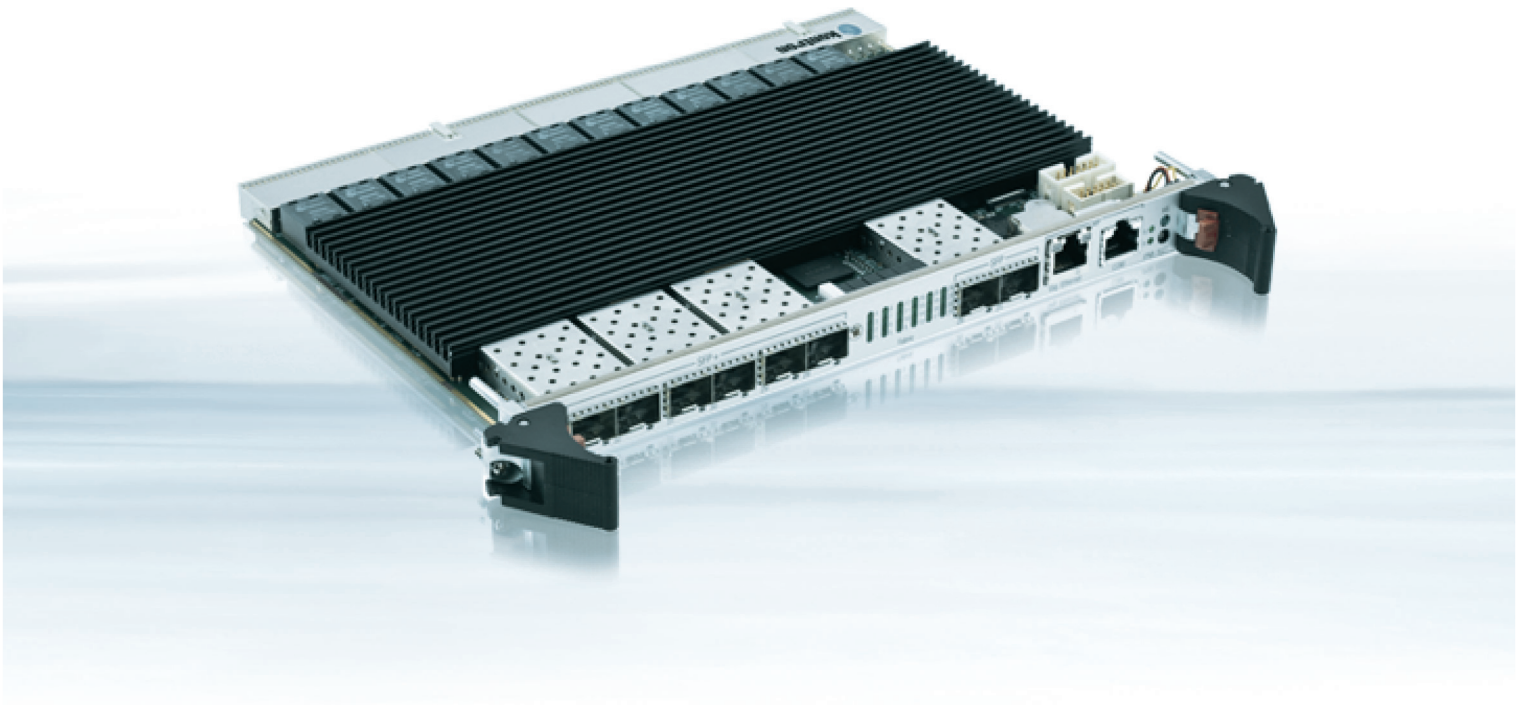

CompactPCI[®]

CompactPCI / VME ETHERNET SWITCH
32 PORT 1/10 Gigabit MANAGED NON-BLOCKING LAYER 2 & 3

- ▶ fully managed layer 2 & 3 switching and routing
- ▶ rugged, reliable & robust
- ▶ versatile, complete rear I/O and uplink support
- ▶ DHCP server & boot media support

POSSIBILITIES START HERE



CP6930

32 PORT 1/10 Gigabit MANAGED NON-BLOCKING LAYER 2 & 3 CompactPCI / VME ETHERNET SWITCH

The Kontron CP6930 is a non blocking fully managed L2/L3 10 Gigabit Ethernet Switch and provides rich and versatile feature support by using highest integration of Ethernet switch silicon.

Bandwidth


The CP6930 is designed for future oriented applications requiring outstanding bandwidth and communication safety. 6 SFP+ front ports running at 10 Gigabit/s full line speed and 2 SFP ports at the front providing 1 Gigabit support gives flexibility and an intrinsic value for today's investments. The 24 rear ports according PICMG2.16 and VITA31.1 fulfil the requirement of CompactPCI and VME systems with highest computing performance.

Reliability

The robust design features including hardware hot swap as well as complete SNMP management support sets the foundation for robust and reliable systems. Built-In test capabilities enable effective switch maintenance.

Management

The CP6930 can be monitored via SNMP, which also allows access to the devices connected to the backplane. A comprehensive command line interface provides easy management and remote configuration by either serial or network interface. Support for features like IP forwarding & multicast, routing & switching, Quality of Service, VLANs it is an ideal Switch for CompactPCI and VME systems according PICMG2.16 and VITA31.1.

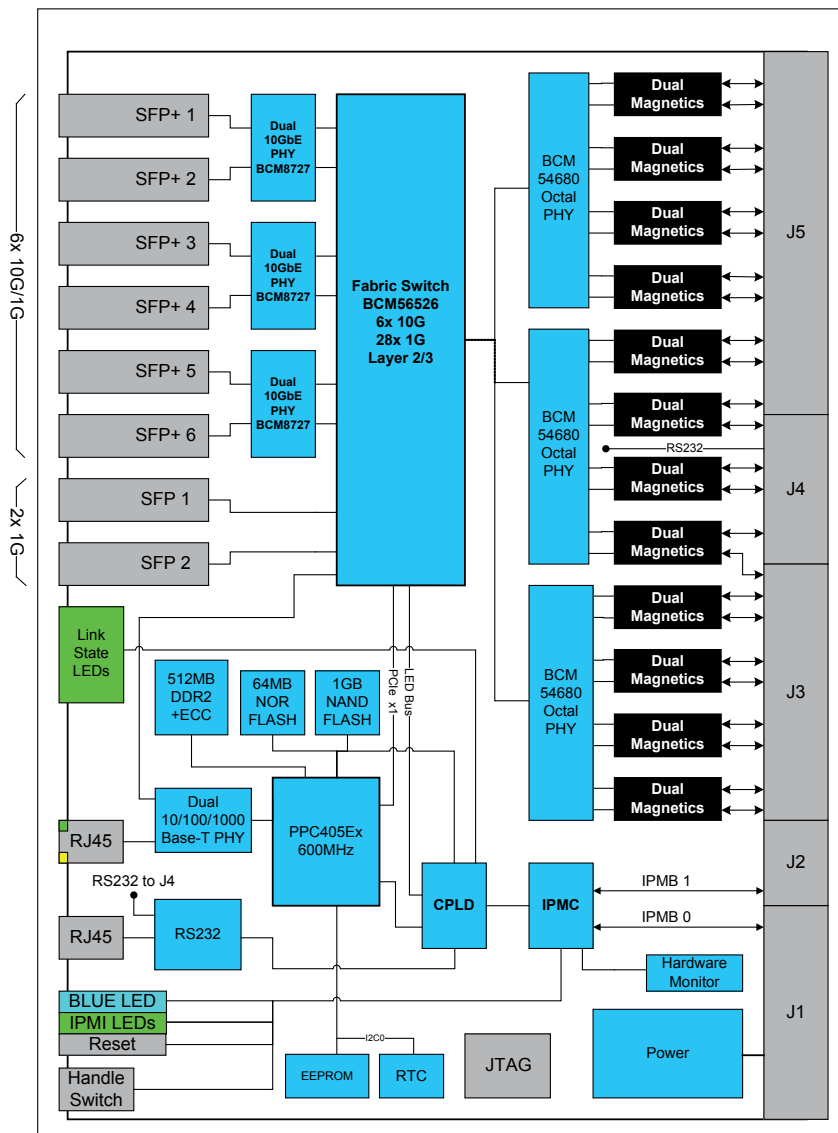

TECHNICAL INFORMATION

COMPLIANCY		CompactPCI® Core Specification PICMG 2.0 Rev. 3.0 CompactPCI® HotSwap Specification PICMG 2.1 Rev. 2.0 CompactPCI® System Management PICMG 2.09 Rev. 1.0 CompactPCI® Packet Switching Backplane PICMG 2.16 Rev. 1.0 VNE64x Packet Switching Backplane VITA 31.1 Intelligent Platform Management Interface Specification V1.5 ANSI/Vita 47-2005 IEC 60068-2-6, IEC 60068-2-27, IEC 60068-2-29 EN 60950, UL60950, LVD 73/23/EEC, Denan Law compliant
INTERFACES		8x 1GBase-X uplinks (SFP connector cages), 6 of them configurable for 10GBase-X operation using SFP+ optical transceivers. SGMII support for 'Copper-SFPs' in 2 of the 8 front panel uplink ports, providing 10/100/1000Base-T modes of operation. 1x 10/100Base-T for Management (RJ45 connector) 1x RS232 for Management (RJ45 connector) Reset Switch Status LEDs 24x 10/100/1000 Base-T link ports on backplane or RTM
CONTROLLER AND SWITCH		Broadcom BCM56526 Ethernet Switch PowerPC IBM PPC405Ex 600 MHz with 512 MByte RAM NXP uController for IPMI
MANAGEMENT		Management via SNMP, Command Line (Telnet, SSH) - In-band - Out of band via Ethernet or RS232 IPMI version 1.5, Power On Self Test DHCP server, relay and Boot media support Reliable software, field upgradable Dual boot images with roll-back capabilities Advanced management monitoring features Ethernet/Bridging protocols include - Link aggregation (802.3ad) - VLANs (802.1Q) - QoS (IEEE 802.1p) - Spanning tree (802.1D, 802.1w) - Flow control (802.3x) - GARP/GVRP, GMRP - ARP, ICMP, OSPF, RIP, VRRP, DVMRP Enhanced Features are - Egress ACLs, IP ACL support - Auto VoIP - IGMP snooping & proxy support - Startup configuration configurable - Watchdog - Cable test
GENERAL	POWER CONSUMPTION DIMENSIONS WEIGHT MTBF TEMPERATURE RANGE HUMIDITY	Max. 75 W 233,5 x 160 mm, 6U Approx. 800 gr. 217.387h acc. Telcordia Issue 1, Method I Case 3 Ground Benign, Controlled 0° C to +60° C 93 % RH at 40° C, non-condensing (acc. to IEC 60068-2-78)

ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
CP6930	1036-1656	6U, single slot Gigabit Ethernet Switch with complete L2/L3 management, 24x rear 1 GbE, 2x front 1 GbE and 6x 10 GbE Uplinks
CP-RI06-923	36309	6U, 4HP, rear transition module for PICMG2.16 switch, 12 ports (ports 12 to 23), RJ45, RS232 on RJ45
CP-RI06-923	36310	6U, 8HP, rear transition module for PICMG2.16 switch, 24 ports (ports F, 1 to 23), RJ45, RS232 on RJ45

CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com

NORTH AMERICA

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: + 1 888 294 4558
Fax: + 1 858 677 0898
info@us.kontron.com

ASIA PACIFIC

1-2F, 10 Building, No. 8 Liangshuihe 2nd Street,
Economical & Technological Development Zone,
Beijing, 100176, P.R.China
Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn