


VX3030

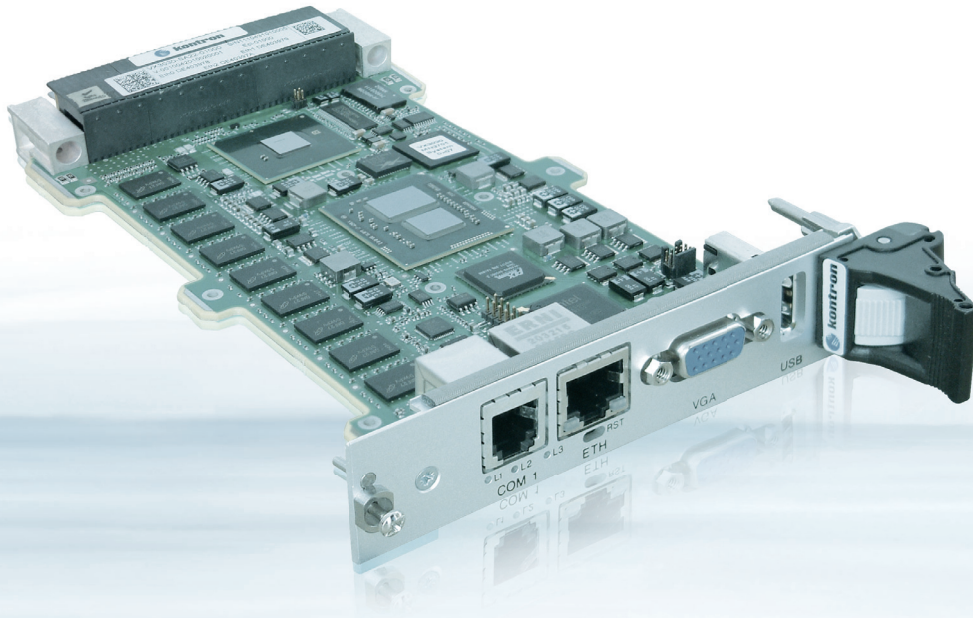

3U VPX INTEL® CORE™ i7 SINGLE BOARD COMPUTER

- ▶ new micro architecture - Quad execution thread VPX SBC
- ▶ Intel® Dual Core™ Core i7 with integrated DDR3 memory controller
- ▶ two cores with hyperthreading (4 threads total) from 1.67 GHz to 2 GHz
- ▶ up to 8 GByte on 2 channels, DDR3 1067 MHz, ECC registered SDRAM
- ▶ three Gigabit ethernet links to VPX backplane

POSSIBILITIES START HERE



PRODUCT OVERVIEW

VX3030 is a multipurpose 3U VPX rugged single board computer offering the ultimate performance for embedded applications. Coupled with Kontron Long Term Supply policy, this board is poised to become the general purpose small SBC for many generations of embedded applications for the Military and Aerospace market. Based on Intel®'s high performance computing architecture, VX3030 offers the best features set:

STANDARDS

- ▶ 3U VPX VITA 46, OpenVPX VITA65, VPX REDI VITA 48.
- ▶ Single CPU: compatible with all existing legacy application x86 code.

SWAP-C

- ▶ Four Execution Threads: compact 4-way SMP solution for parallel computing tasks at low power, low size.
- ▶ Turbo Boost: up to 2.5 GHz operation of a single threaded workload in the same power envelope.
- ▶ Integrated Graphics Controller with two DisplayPorts or VGA: for all HMI applications.

SAFETY CRITICAL

- ▶ Two channels of DDR3 soldered memory with ECC: performance and security.
- ▶ 64 KByte of permanent Ferroelectric Random Access Memory (F-RAM) allowing permanent retention of application key operational data.
- ▶ 8 GByte of System Flash with Recovery BIOS Image and permanent storage of BIOS parameters.

RUGGED DESIGN

Rugged Conduction-Cooled version: for the harshest environments.

CONNECTIVITY

- ▶ Up to 5 lanes of PCIe to the backplane: I/O extensions at peak bandwidth.
- ▶ 4 SATA ports to the backplane: for secure RAID storage Applications.

VERSATILITY


- ▶ VX3030 is compatible with 0.8" and 1" slot pitch. Pick the best size/power tradeoff for your application.
- ▶ Extension connectors on top and bottom allow SBC custom extension for cost effective program customizations.

LONG TERM SUPPLY (LTS)

VX3030 is the member of Extended Life Cycle product family, which offers a 15-year life cycle organisation on top of Intel® embedded product line silicon life cycle.

Available in Kontron 3U VPX development systems, along with 3U VPX carriers and 3U VPX Ethernet switches, the VX3030 is the ideal candidate for long term programs in search of general purpose or compact high performance parallel computing solutions.

VX3030 BLOCK DIAGRAM AND FRONT PANEL

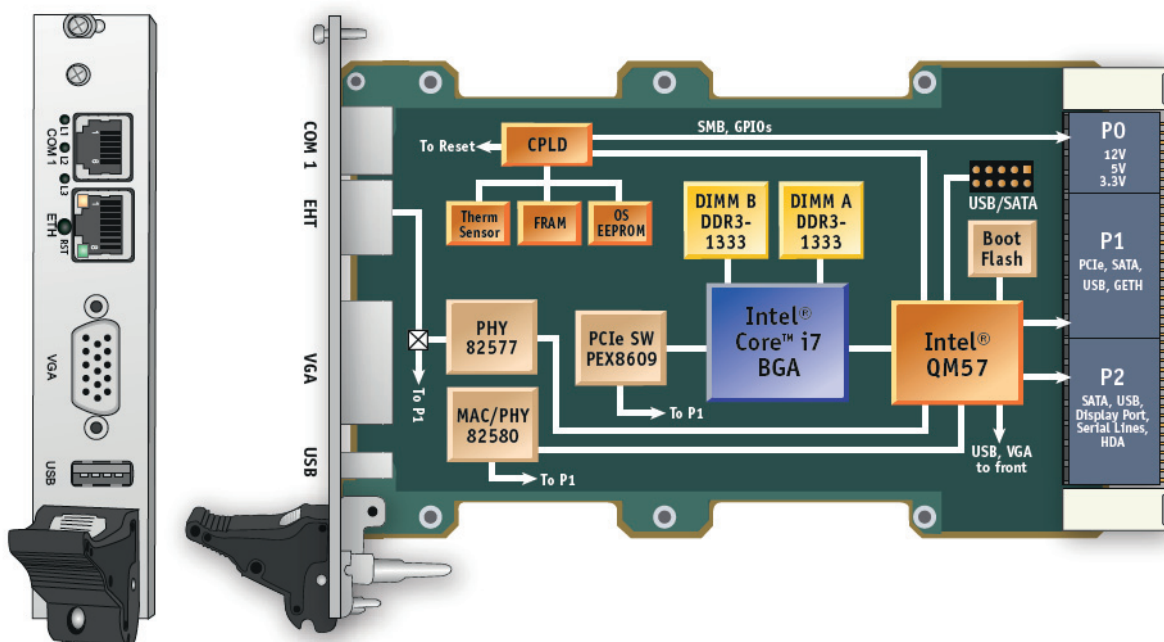

► TECHNICAL INFORMATION

PROCESSOR		Intel® Core™ i7 processor (32nm manufacturing process): Core i7-620LE: 2.0 GHz, LV, 4 MByte L3 cache (shared instruction/data cache between both cores) Please contact Kontron for further information concerning the suitability of other Intel processors for use with the VX3030
MEMORY	SYSTEM MEMORY FLASH (UEFI BIOS) EEPROM USB/SATA NAND FLASH	Up to 8 GByte dual channel DDR3 SDRAM running at 1066 MHz, with ECC, soldered 8 MByte FLASH, with recovery image and uEFI BIOS settings Serial EEPROM (24LC64) 8 KByte for storing product VPD Up to 32 GByte SATA Nand Flash storage Flash mezzanine socket for USB or SATA NAND Flash modules (typically 8, 16 or 32 GByte)
ONBOARD CONTROLLER	PLATFORM CONTROLLER HUB GRAPHICS GIGABIT ETHERNET WATCHDOG RTC	Mobile Intel® QM57 Express Chipset: - SATA host controller with six ports with RAID 0/1/5/10 support - USB 2.0 host interface with up to 14 ports (6x ports are used on the VX3030) - 2x PCI Express x4 or 8x PCI Express x1 2.0 ports High performance 3D graphics controller integrated in the processor: - Support for two independent displays - Supports digital display resolutions up to 2560 x 1600 pixels @ 60 Hz - Supports analog display resolutions up to 2048 x 1536 pixels @ 75 Hz - Dynamic Video Memory Technology (DVMT) 3x GbE, 2 1000BASE-BX with Intel i82580 Ethernet controller (rear), One 1000BASE-T with i82577 (front or rear, BIOS option) PLD-based, timeout up to 510s, IRQ, Reset Integrated in QM57 with 256 Byte CMOS RAM plus separate ultra low power time of day device
FRONT INTERFACES 4HP (0,8") OR 5HP (1")	VGA USB ETHERNET SERIAL LEDs	1x VGA-CRT 15-pin D-Sub connector 1x USB 2.0 ports, 4-pin standard USB connectors 1x RJ45 with integrated LEDs (ACT, SPEED) 1x RJ11 one half modem (with CTS/RTS) 3 bicolor Leds for system info (fault, proc hot, WD), and user application feedback
ONBOARD INTERFACES	DEBUG INTERFACE USB/SATA TOP LAYER EXTENSION BOTTOM LAYER EXTENSION	XDP port for processor emulation probe connection 1x onboard FLASH mezzanine socket for USB or SATA modules The high-speed I/O connector holds PCIe x4 channel for I/O extensions (XMC, HDD etc), 3.3V Power This connector holds the following interfaces - PCIe x1 for any I/O extension mezzanine - Four GETH 1000BASE-T signals - 3.3 V Power
VPX INTERFACE	SLOT PROFILES	SLT3-PAY-2F2U-14.2.3 SLT3-PAY-1F1F2U-14.2.4 SLT3-PAY-1F1U-14.2.10
REAR I/O VIA P1/P2		The VX3030 supports: - One x4 PCIe non transparent port - Four SATA II ports - Three Gigabit Ethernet ports - Four USB 2.0 ports - Two EDP ports - One HDA port - One PCIe x1 link. - Two simplified EIA232/EIA485 serial (one with CTS/RTS)
SUPERVISORY FUNCTIONS		- Non Maskable RESET, - NVMRO, SMB 0 and SMB 1 interfaces for Status, Start , Reset. Compatible with Kontron CMB, temperature and voltage sensors on the board. - PCIe optional reference clock

▶ ENVIRONMENTAL SPECIFICATION

	SA - STANDARD COMMERCIAL (1" single height passive module heat sink, forced air)	RA - RUGGED AIR-COOLED (Optional)	RC - RUGGED CONDUCTION- COOLED (Depending on processor frequency)
CONFORMAL COATING	Optional	Standard	Standard
AIRFLOW	3 m/s	Tbd.	na
TEMPERATURE	VITA 47-Class AC1	VITA 47-Class AC3	VITA 47-Class CC4
COOLING METHOD	Convection	Convection	Conduction
OPERATING	0° to +55° C	-40° to +70° C	-40° to +85° C
STORAGE	-45° to +85° C	-45° to +100° C	-45° to +100° C
VIBRATION SINE (OPERATING)	20-500 Hz - 2 g	5-2,000 Hz - 3 g	20-2,000 Hz - 5 g
RANDOM	VITA 47-Class V1	VITA 47-Class V2	VITA 47-Class V3
SHOCK (OPERATING)	20g/11 ms Half Sine	40g/11 ms Half Sine	40g/11 ms Half Sine
ALTITUDE (OPERATING)	-1,500 to 60,000 ft	-1,500 to 60,000 ft	-1,500 to 60,000 ft
RELATIVE HUMIDITY	90 % without condensation	95 % without condensation	95 % without condensation

▶ ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
SA - STANDARD COMMERCIAL VX3030	VX3030-SA22-01000	Air-cooled 3U VPX Single Board Computer, 2 GHz Intel® Core™ i7, 2 GByte DDR3-SDRAM, front: 1»
RC - RUGGED CONDUCTION-COOLED VX3030	VX3030-RC22-0N000	Rugged conduction-cooled 3U VPX Single Board Computer, 2 GHz Intel® Core™ i7, 2 GByte DDR3-SDRAM

Note: For 4 GByte and 8 GByte DDR3-SDRAM, for alternate CPU type and rear I/O equipment, please contact Kontron.

▶ CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com

NORTH AMERICA

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: + 1 888 294 4558
Fax: + 1 858 677 0898
info@us.kontron.com

ASIA PACIFIC

1-2F, 10 Building, No. 8 Liangshuihe 2nd Street,
Economical & Technological Development Zone,
Beijing, 100176, P.R.China
Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn