



mITX-BDW-U

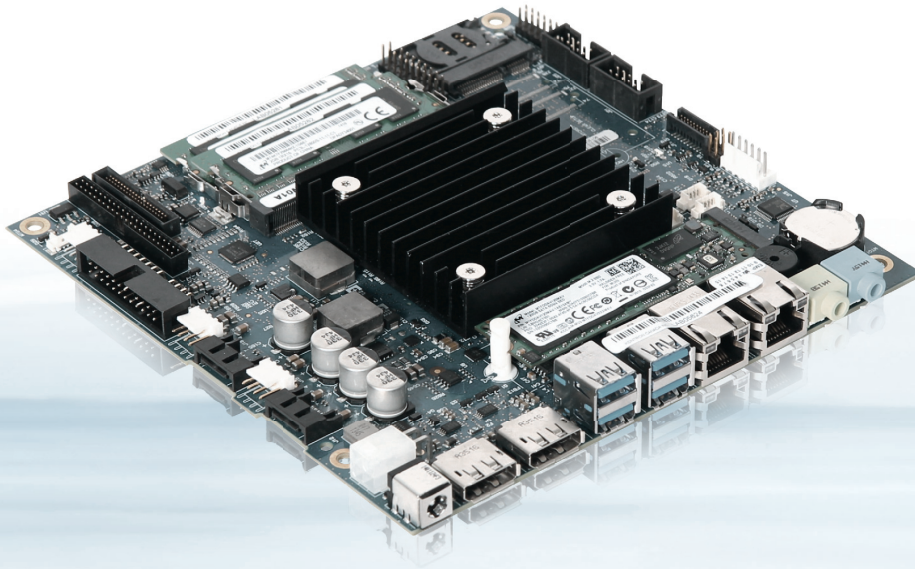

LOW POWER, IOT READY EMBEDDED mITX MOTHERBOARD WITH 5TH GENERATION Intel® 14NM CORE I7, I5 & I3 PROCESSORS

- ▶ embedded mITX motherboard with up to 7 years availability
- ▶ thin profile, low power platform with 15W CPUs in 23mm envelope
- ▶ supporting 3 independent displays pipes via 2x DisplayPort and LVDS
- ▶ operating temperature range from 0°C to +60°C
- ▶ powered by 19V notebook-style power adapter or internal 12V connector

POSSIBILITIES START HERE



▶ TECHNICAL INFORMATION

FEATURES	5th Generation Intel® Core i7, i5 & i3 Motherboards
FORM FACTOR	mITX – low profile: 170 mm x 170 mm x 23 mm (6.7" x 6.7" x 0.9")
CPU	Intel® Core i7/i5/i3 2C CPU clock up to 3.2 GHz
GRAPHICS	Integrated into CPU with GT2 or GT3 depending on CPU type
GRAPHIC INTERFACE	2x Display Port revision 1.2 in Rear IO and LVDS 18bpp/24bpp internally
MEMORY	Up to 16 GByte DDR3L (2x 8 GByte SO-DIMM modules), 1333 & 1600 MT/s support.
CHIPSET	Intel® Broadwell PCH-LP on multi-chip package BGA with CPU
SATA	3x SATA 6 Gb/s (one on M.2) w. RAID 0 & 1
USB	4x USB 3.0 in Rear I/O, 2x USB 2.0 on front panel & 1x on mPCIe socket.
AUDIO	HD Audio codec supporting 5.1 channel surround sound
ETHERNET	2x Intel Gigabit-LAN
AVAILABLE I/OS	1x Mini-PCIe with SIM card holder, 1x M.2 (2280), 2x COM (RS232)
REAR I/O	19V DC input, 2x Display port, 4x USB 3.0, 2x RJ45, Audio jack for line-in & headset.
SPECIAL FEATURE	Intel® AES security, Kontron embedded feature connector with ADC, DAC up to 160 GPIO
OS SUPPORT	Win7, Win8.1 & Linux
TEMPERATURE	Operating 0 °C to 60 °C (32 °F - 140 °F)
ADDITIONAL	Up to 7 years availability

▶ mITX-BDW-U

- ▶ **Digital Signage:** Low profile, low power & multi display support
- ▶ **Gaming/POS/POI:** High graphics and high CPU performance-to-power ratio
- ▶ **Industrial Automation:** Wide range of I/Os & longevity
- ▶ **Future-oriented Devices:** IoT support through eg. WWAN support. SATA and x2 PCIe SSD support in M.2 socket.



▶ ORDERING INFORMATION

ARTICLE	PART NO.*	ARTICLE**
mITX-BDW-U I7 GT3	810610-4500	i7-5650U, 4M, up to 3.2 GHz
mITX-BDW-U I5 GT3	810611-4500	i5-5350U, 3M, up to 2.9 GHz
mITX-BDW-U I3 GT2	810612-4500	i3-5010U, 3M, up to 2.1 GHz

RECOMMENDED MEMORY MODULES	NEW SKU 04/16*	OLD SKU	SKU NAME **
	1060-2520	1055-9939	DDR3L-1600 SODIMM 2 GByte
	1060-2522	1055-9941	DDR3L-1600 SODIMM 4 GByte
	1060-2524	1055-9942	DDR3L-1600 SODIMM 8 GByte

Note: Motherboards come pre-assembled with heatsink. Fan included in packaging.
 *SKU changes were caused by administrative issues only, no hardware changes.
 **Named are always the min. requirements, the shipped memory can fulfill a higher performance level

▶ CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
 86156 Augsburg
 Germany
 Tel.: + 49 821 4086 0
 Fax: + 49 821 4086 111
 sales@kontron.com

NORTH AMERICA

14118 Stowe Drive
 Poway, CA 92064-7147
 USA
 Tel.: + 1 888 294 4558
 Fax: + 1 858 677 0898
 info@us.kontron.com

ASIA PACIFIC

17 Building, Block #1, ABP
 188 Southern West 4th Ring Road
 Beijing 100070, P.R.China
 Tel.: + 86 10 63751188
 Fax: + 86 10 83682438
 info@kontron.cn