




**MODPACK
ANALOG &
DIGITAL
I/O**

PB-DOUT2

16-Channel Optoisolated Digital Output MODPACK

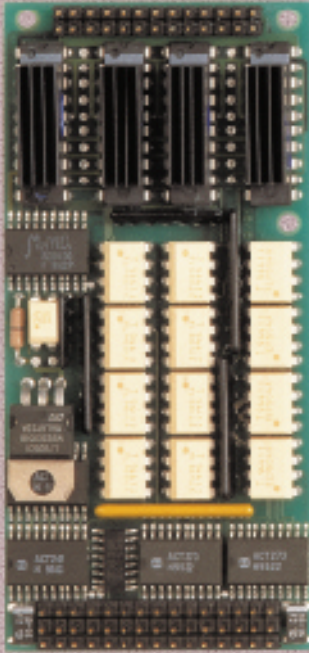

Characteristics


Function:	16 optoisolated digital output channels with intelligent common Vcc high-side switches
Output Voltage:	24V DC (typ.), 28V DC (max.)
Max. Transient Volt.:	80V DC
Output Protection:	Overvoltage (35V DC)
Output Current:	1A per channel (6.0A for all channels)
Max. Transient Cur.:	3.75A per channel
Output Frequency:	20kHz (duty cycle 1:1)
T _{on} Rise-Time:	15µs
T _{off} Fall-Time:	2µs
R _{on} Resistance:	1.3Ω (on-state resistance)

Smart Transistor

Diagnostics:	Switch ON/OFF status Open or shorted load Operating temperature Excessive supply voltage
--------------	---

Common

Isolation:	500V DC between I/O and system
Power Req.:	+5V DC (±5%), 200mA typ.
Temp. Ranges:	0°C to +70°C -40°C to +85°C (opt. E2) -55°C to +85°C (storage)
Humidity:	5% to 95% non-condensing

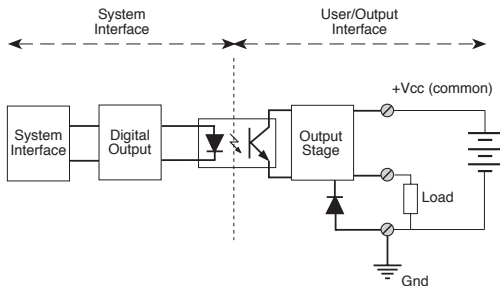

A 16 channel digital output module based around an intelligent "SMART" transistor which prevents the circuitry being damaged through overload or over-heating. High-side switches (common Vcc) are used to power ground referenced loads and provide protection against short circuits and overloading. Additionally, open circuit detection and inductive load protection are built-in features of this versatile piggyback for use with PEP's range of dedicated carrier boards. Circuit diagnostics are available for each group of four outputs to produce systems with intelligent feedback of switch status as well as load fault conditions for troubleshooting purposes.

Product	Description	Order No.
PB-DOUT2	16 channel optoisolated industrial piggyback with intelligent transistor high-side switch outputs capable of supplying 24V loads with up to 1.0A and providing diagnostics, over-voltage, over-temperature and inductive load protection.	3082

U.S.A.: Tel.: ++1 412 921 3322
U.K.: Tel.: ++44 (0) 1273 44 11 88
France: Tel.: ++33 (0) 1 39 16 10 30
Belgium: Tel.: ++32 (0) 2 461 04 08

Holland: Tel.: ++31 (0) 76 5217 957
Sweden: Tel.: ++46 (0) 8 756 72 60
Poland: Tel.: ++48 (0) 2 28 23 55 73
S. Korea: Tel.: ++82 (0) 25 58 08 38

PEP Modular Computers GmbH
 Apfeltrangerstr. 16
 D-87600 Kaufbeuren
 Tel.: ++49 (0) 8341 803 - 0
 Fax: ++49 (0) 8341 803 - 499
 Internet: <http://www.pep.com>
 E-mail: info@pep-kaufbeuren.de

