

**CPCI
Power Supply
Manual**

PRODUCT DOCUMENTATION

**PD14
CP3-SVE-P200DC-24V**

Reference ID:24139 PD14, Rev. 02
June 28, 2013



Revision History

Manual / Product Title:		CPCI Power Supply Manual: Product Documentation: CP3-SVE-P200DC-24V
Reference ID:		24139 PD14
Rev.	Brief Description of Changes	Date of Issue
01	Initial issue	Jan. 22, 2009
02	Updated specifications for Environmental parameters	Jun. 28, 2013

Imprint

Kontron Europe GmbH may be contacted via the following:

MAILING ADDRESS

Kontron Europe GmbH
Sudetenstraße 7
D - 87600 Kaufbeuren Germany

TELEPHONE AND E-MAIL

+49 (0) 800-SALESKONTRON
sales@kontron.com

For information about other Kontron products, please visit our Internet web site:

www.kontron.com

Disclaimer

Copyright © 2009-2013 Kontron AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Kontron and the Kontron logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. Specifications are subject to change without notice.





1. Introduction

The specific product description provided with this product documentation is part of the PEP's CPCI Power Supply manual. For further information, in particular regarding general details as well as safety and warranty statements, refer to the CPCI Power Supply Manual, ID 24139.

2. 200W P-Type Power Supply Unit

The main features of the 3U P-type, 18V ... 36V DC input, 200W output DC/DC power supply unit CP3-SVE-P200DC-24V are described in the following table:

Table 1: Distinctive Features of Power Supply Unit CP3-SVE-P200DC-24V

FEATURE	SPECIFICATION
Form Factor	3U
Front Panel Size	40.34 mm x 128.6 mm
Mechanics	19" rack
Plug-In Compatibility	Yes
Power Supply Connector	Positronic 47-pin connector
Input Voltage	18 ... 36 V DC
Voltage Switching	Widerange
Output Power	200W with 250 LFM forced-air cooling (ca. 1.3 m/s)
Output Voltages / Currents	$V_1 = + 5V$ at 25 A $V_2 = + 3.3 V$ at 36 A $V_3 = + 12 V$ at 3 A $V_4 = - 12 V$ at 0.5 A
Cooling	250 LFM forced-air cooling (ca. 1.3 m/s)
Redundant Supply Capability	Always
Status Indication	LED's for input good and power fail
Special Feature(s)	None




2.1 Mechanical Specifications

Figure 1: View of Power Supply Unit CP3-SVE-P200DC





Figure 2: Power Supply Dimensions

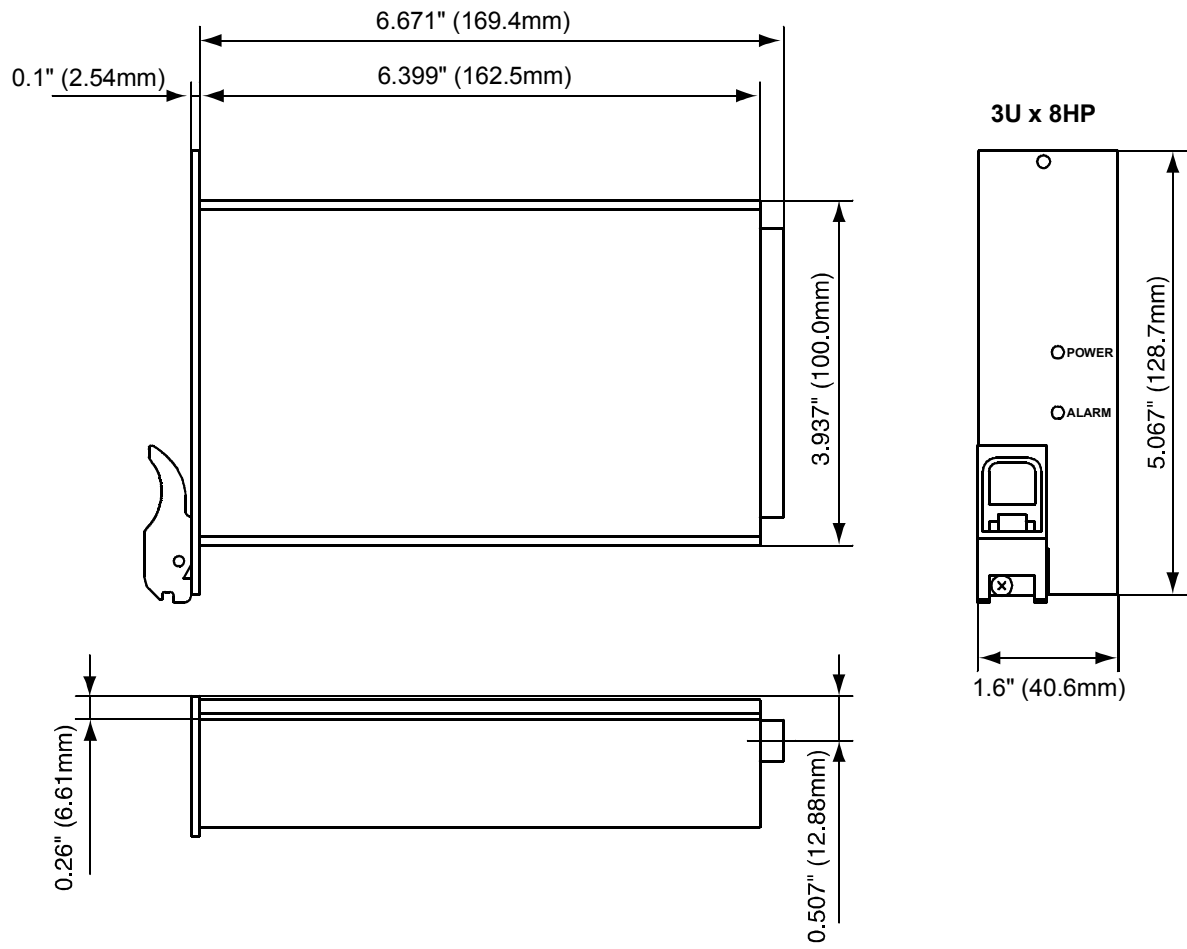



2.2 Power Supply Connector

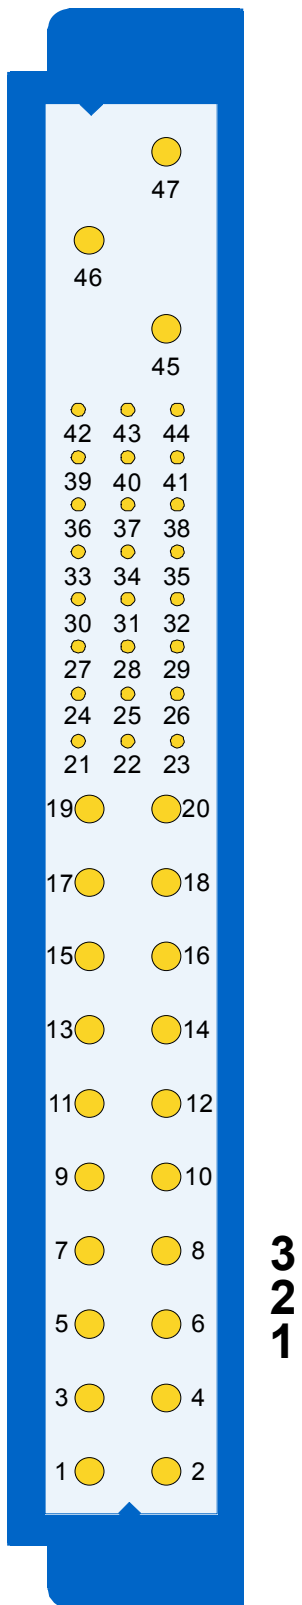


Figure 3: Orientation of the Positronic P-47 Power Supply Connector

The DC input voltage to the power supply unit and the V1 ... V4 output voltages from the power supply unit to the back-plane are connected via a 47-pin Positronic male power supply connector.

For the pinouts of the Positronic P-47 power supply connector please refer to the following table.



Table 2: Positronic 47-Pin Connector Pinout

PIN	SIGNAL NAME	DESCRIPTION	PIN	SIGNAL NAME	DESCRIPTION
1 - 4	V1	V1 OUTPUT (+5V)	32	NC	NOT CONNECTED
5 - 12	RTN	V1 and V2 RETURN	33	V2 SENSE	V2 REMOTE SENSE
13 - 18	V2	V2 OUTPUT (+3.3V)	34	S RTN	SENSE RETURN
19	RTN	V3 RETURN	35	V1 SHARE	V1 CURRENT SHARE
20	V3	V3 OUTPUT (+12V)	36	V3 SENSE	Not Used
21	V4	V4 OUTPUT (-12V)	37	IPMB_SCL	Res. f. SM Bus
22	RTN	SIGNAL RETURN	38	DEG#	DEGRADE SIGNAL
23	RESERVED	RESERVED	39	INH#	INHIBIT
24	RTN	V4 RETURN	40	IPMB_SDA	Res. f. SM Bus
25	GA0	GA Bit 0	41	V2 SHARE	V2 CURRENT SHARE
26	RESERVED	RESERVED	42	FAL#	FAIL SIGNAL
27	EN#	ENABLE	43	IPMB_PWR	Res. f. SM Bus
28	GA1	GA Bit 1	44	V3 SHARE	V3 CURRENT SHARE
29	NC	NOT CONNECTED	45	CGND	CHASSIS GROUND (safety ground)
30	V1SENSE	V1 REMOTE SENSE	46	+DCIN	+ DC Input
31	GA2	GA Bit 2	47	-DCIN	- DC Input

2.3 Installation

Thanks to its plug-in compatibility this P-type power supply unit allows for an easy installation, by which the power supply unit's male Positronic 47-pin power connector is inserted into the backplane's mating female connector without the need of any intermediate adaptation.



Warning!

If this type of power supply is removed for any reason from an operating system, do not reinstall immediately. Wait 1 to 2 minutes before reinstalling. Failure to comply with this may result in an Output Failure indication on the power supply. This is due to an internal protection feature of the power supply which requires time to cool down before the power supply is put back into operation.



2.4 Electrical Specifications

INPUT

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - DC	Continuous input range.	18		36	VDC
Hold-up Time	From 24 VDC input	None			ms
Input Current	At full rated load				A
Input Protection	Non-user serviceable, internally-located input line fuse.				
Inrush Surge Current	Internally limited by thermistor and electronic switch.			20	A
Operating Frequency	Switching frequency of main output transformer.	125		145	kHz

OUTPUT

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full rated load, 24 VDC input		>= 83		%
Minimum Load; V1, V2, V3	Minimum load required to maintain regulation with no load on V4	None			A
Minimum Load, V3	Minimum load on V3 required to maintain regulation on V4	None			A
Ripple and Noise	Full load, 20 MHz bandwidth	See Regulation table			
Output Power	250 LFM forced-air cooling (ca. 1.3 m/s)			200	W
Overshoot / Undershoot	Output voltage overshoot / undershoot at turn-on			0	%
Regulation	Varies by output. Total regulation includes: line changes over the specified input range, changes in load starting at 50% load and changing to 100% load	See Regulation table			
Turn-on Delay	Time required for initial output voltage stabilization		1	sec	
Initial Setting Accuracy			±1		%

REGULATION

OUTPUT VOLTAGE		ADJUSTMENT RANGE	OUTPUT CURRENT	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE pk-pk
V1	+5V	N/A	25A	0.5%	1%	< 60 mV _{PP}
V2	+3.3V	N/A	36A	0.5%	1%	< 60 mV _{PP}
V3	+12V	N/A	3A	0.5%	1%	< 120 mV _{PP}
V4	-12V	N/A	0.5A	0.5%	1%	< 120 mV _{PP}





PROTECTION AND CONTROL

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Latch style overvoltage protection.		125		%Vnom
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.	Available			
Overtemperature Protection	System shutdown due to excessive internal temperature, automatic reset.	Available			
Power Fail (FAL#)	TTL compatible signal, open collector active low signal. Indicates any output below 90% and/or a low input <36VDC.	Available			
Current Share	Accuracy of shared current with up to 6 parallel units of the same type of power supply. Single wire current share on V1, V2, and V3.			10	%
Remote Sense	Available on V1, V2, and V3. Total voltage compensation for cable losses with respect to the main output.			±150	mV
Inhibit (INH#)	TTL-compatible signal inhibited with GND or TTL "0".	Available			
Enable (EN#)	Contact closure to external ground to start unit. On shortest pin (last make, first break).	Available			
Overtemperature Warning (DEG#)	Provides warning when power supply temperature exceeds rating. TTL-compatible open.	Available (activated before thermal shutdown)			
Front Panel LED Status Indicators	Input OK (Green), Output Failure (Red). In redundant setups, Output Failure may also indicate that there is no main power input to the power supply.	Available			

SAFTEY, REGULATORY, AND EMI

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	UL1950, cUL1950, EN60950 (TÜV).	Approved			
Dielectric Withstand Voltage	Input to Output per EN60950.	4243			VDC
Electromagnetic Interference	EN55022 / CISPR 22 Conducted: Radiated:	A A			Class
ESD Susceptibility	Per EN61000-4-2, level 4.	8			kV
Radiated Susceptibility	Per EN61000-4-3, level 3.	10			V/m
EFT/Burst	Per EN61000-4-4, level 3.	± 2			kV
Input Surge	Per EN61000-4-5, level 3. Line to Line Line to Ground	1 2			kV



SAFTEY, REGULATORY, AND EMI

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Conducted Disturbance	Per EN61000-4-6, level 2.			3	V
Insulation Resistance	Input to Output.		tbd		MΩ

ENVIRONMENTAL

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating. Non-Operating.				ASL Ft.
Operating Temperature	With 250 LFM forced-air cooling At 100% load: Derate linearly above 50°C by 5W per °C. At 50% load:	- 20		+ 55 + 70	°C
Storage Temperature		- 40		+ 85	°C
Relative Humidity	Non-Condensing.	5		93	%RH
Shock	Peak acceleration.			20	GPK
Vibration	Random vibration, 10 Hz to 500 Hz, 3 axis.			1.9	GRMS



Warning!

Adequate thermal cooling of the power supply must be ensured. Therefore do not obstruct or hinder cooling air circulation or heat conduction within the power supply or surrounding equipment.

Failure to comply with this warning may result in damage to your equipment.